

SPC Wall coverings

Caratteristiche / Features	SPC incastro T&G
Composizione / Composition:	PVC eterogeneo + fibra minerale / Heterogeneous PVC + mineral fibre
Spessore / Thickness:	3 mm / 4 mm
Strato di usura / Wear layer:	0,20 mm
Pannelli / Panels :	60 x 120 cm / 60 x 280 cm
Confezioni / Packages:	1 scatola contiene 4 pannelli da 60x120cm 1 box contains 4 panels 60x120cm 1 scatola contiene 2 pannelli da 60x280cm 1 box contains 2 panels 60x280cm



IGNIFUGO
CLASSE BFL
S1 EN 9239




EMISSIONE
FORMALDEIDE
E1



RESISTENZA UV
ISO 105 B02



RESISTENZA
AGENTI CHIMICI
EN 423

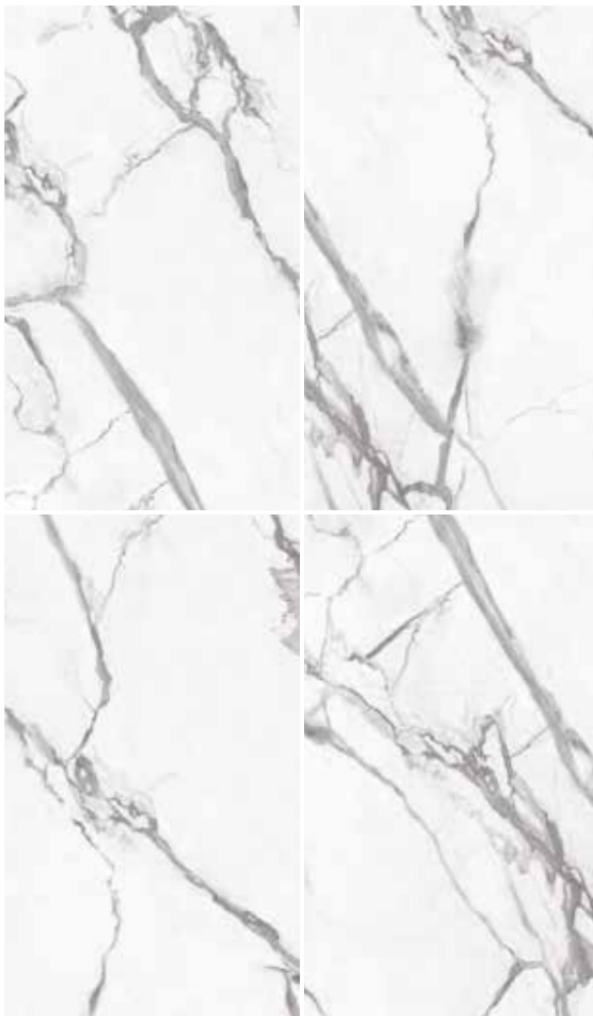

SPCW4146 (60x120cm-3mm)

Conf. 4 pezzi



60 cm

120 cm



COLLANTE DEDICATO / DEDICATED GLUE

